





# Contents

## Medium PLC

MX600 Series  
MC8000 Series\*  
MC6000 Series  
MC5000 Series

## Small PLC

MU400 Series  
MU300 Series  
MU200 Series  
MC700 Series  
MC280/MC200E Series  
MC200 Series  
MC100 Series

## Remote I/O Module

MR400 Series  
MC5000S Series

## Temperature Controller

MQT Series  
MTC/MTCW/MTCV Series  
MTCE Series  
MCAS Series  
MDT Series

## Cable List

Cable List

## HMI

MZ800 Series

## MX600 Series Medium PLC

MX600 series intelligent controller breaks through the 256-axis  $\mu$ s-level synchronous control, supports EtherCAT, EtherNET / IP, ProfiNet and other bus protocols, and the redundant architecture ensures 99.999 % extreme condition stability. It covers high-precision scenarios such as lithium battery winding, semiconductor, photovoltaic, etc., and synchronously meets the ms-level sequential control requirements of 3C assembly, five-axis machining and high-speed packaging.

### Product Feature



- Support 16-axis/250us, 64-axis/500us and 256-axis/2ms sync cycles, and 20us jitter to ensure high-precision control.




/photoaging.



## MC8000 Series Medium PLC \*

MC8000 series product is a new generation of high-performance and cost-effective medium PLC based on the mOPAX platform of MEGMEET. It is fully compatible with the IEC61131-3 programming specification and supports LD, ST, SFC, CFC, FBD, and IL programming languages; adopts the blade-type module design, and supports multi-core processor. Based on multi-bus protocols such as EtherCAT and Profinet, a multi-axis motion control system is constructed, to meet the high-speed response requirements of intelligent devices.

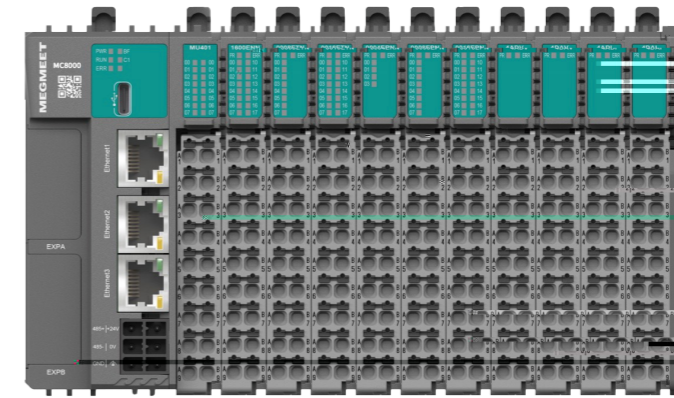

### Product Feature

#### Strong expansion & networking

- Expand up to 32 modules, support the expansion of digital, analog, CAN, RS485, RS232, etc.
- Full protocol compatibility, support Modbus/EtherCAT/EtherNet IP/Profinet and others.

#### Precise Multi-axis control

- 1ms/16-axis sync, support 16/32/64-axis EtherCAT control

#### Ultra-large capacity

- Support 10M program capacity, 20M data capacity, 512KB retention, for complex logic and data processing

#### Reliably excellent performance

- Four-core A55 processor, communication, logic and algorithm are completely independent.
- 8\*200K high-speed input, 8\*200K pulse output (single pulse, pulse + direction, AB phase, FWD+REV, etc.)

#### Flexible & convenient operation


- 12mm machine body, saving space
- PUSH In terminal, easily wiring and replacing without tools





## MU300 Series Small PLC

E-gear and other control function, to achieve high-speed operation and efficient communication, flexible configuration and

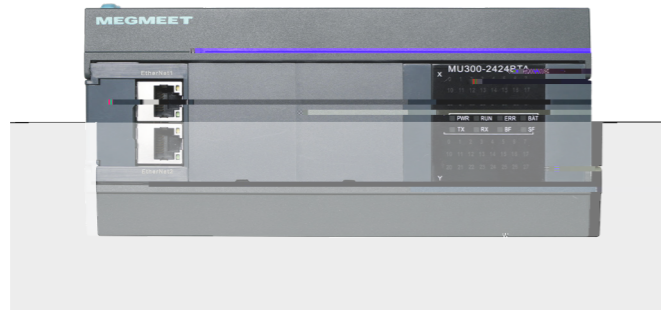

### Key Features

- 
- 

### Technical Specifications

- $\mu$
- Communication port: 1\*EtherCAT+2\*EtherNet,

### Performance

- significantly improved based on ARM+FPGA
- Support 8-channel 200K high-speed pulse output and single-phase pulse count, or 4-channel 100K AB-phase, CW/CCW, pulse+direction
- 

### Configuration

- 
- 
- 

Model	IO Points	Power Supply
MU300-2424B	24 DI, 24 DO	24VDC/5A
MU300-3232B	32 DI, 32 DO	24VDC/5A
MU300-4040B	40 DI, 40 DO	24VDC/5A
MU300-4848B	48 DI, 48 DO	24VDC/5A
MU300-5656B	56 DI, 56 DO	24VDC/5A
MU300-6464B	64 DI, 64 DO	24VDC/5A
MU300-7272B	72 DI, 72 DO	24VDC/5A
MU300-8080B	80 DI, 80 DO	24VDC/5A

## MU200 Series Small PLC

MU200 new generation of small PLC uses ARM+FPGA dual-core processor for the powerful processing function,



### Key Features

- 
- 

### Technical Specifications

- 
- 

### Performance

- significantly improved based on ARM+FPGA
- Support up to 12-channel 200K high-speed pulse output
- 

### Configuration

- Convenient hardware configuration
- 
- 
- 
-



1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100





J T



## MQT Series Temperature Controller

modules flexibly and integrating internal intelligent PID algorithm; it has the advantages of cascade, high precision,




High precision:

High performance:

Strong function:

Simple installation:

Complete module:

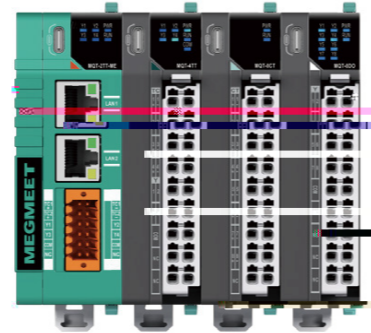

Item	escription	
Power supply	24V C (-15% ~ 20%)	
Signal input	Input type	Thermocouple: K、J、E、N、T、R、B (For all channel) Thermal resistance: Pt100、JPt100、Cu100、Ni120 (For all channel)
	Precision	Thermocouple: 0.15% (Full scale) + cold compensation Thermal resistance: 0.3% (Full scale)
	Sampling cycle	25ms/channel, 100ms/8 channels, 100ms/4 channels
Control output	Output form	Transistor output (SSR drive output), relay output, current output, voltage output
	Control action	Manual, ON / OFF, single PI, heating & cooling PI, position proportional PI
Alarm output	Alarm form	14 alarms, such as upper and lower limit alarm, deviation alarm and so on.
	Output form	Transistor and relay output (output state can be directly controlled by writing registers)
	Output channel	8 channels
igital input	Input form	Transistor input
	Input channel	4 channels
Control cycle	0.1s - 10s or 1s - 100s	
Acquisition channel	4 channels and 8 channels	
Isolation	Exist between power and communication, power and channel, communication and channel, channel and channel	
Communication port	RS485/Modbus-TCP/EtherNet/EtherCAT/Profinet	
Generals	Ambient temperature	Working: -20 ~ 60 °C, storage: -40 ~ 70 °C
	Ambient humidity	Working: 10 ~ 90 % RH (no condensation), keeping: 5 ~ 95 % RH (no condensation)
	Altitude	Below 2000m
	Protection level	IP20
C & S	Conform to IEC/EN 61326-1 (For use in industrial locations) ; CE	

Model	Acquisition channel	Temperature control output	Alarm output	Input type
Communication module				
M <sup>Q</sup> T-2TT-ME	2-CH	Modbus TCP/IP/Ethernet	Transistor(4-CH)	TC
M <sup>Q</sup> T-2RT-ME	2-CH	Modbus TCP/IP/Ethernet	Transistor(4-CH)	RT
M <sup>Q</sup> T-2TT-ET	2-CH	EtherCAT从站	Transistor(4-CH)	TC
M <sup>Q</sup> T-2RT-ET	2-CH	EtherCAT从站	Transistor(4-CH)	RT
M <sup>Q</sup> T-2TT-RS	2-CH	Modbus RS485	Transistor(4-CH)	TC
M <sup>Q</sup> T-2RT-RS	2-CH	Modbus RS485	Transistor(4-CH)	RT
M <sup>Q</sup> T-2TT-PN	2-CH	Profinet	Transistor(4-CH)	TC
M <sup>Q</sup> T-2RT-PN	2-CH	Profinet	Transistor(4-CH)	RT
Temperature control module				
M <sup>Q</sup> T-4TT	4-CH	Modbus RS485	Transistor(4-CH)	TC
M <sup>Q</sup> T-4TA	4-CH	Modbus RS485	Analog(4-CH)	TC
M <sup>Q</sup> T-4TR	4-CH	Modbus RS485	Relay(4-CH)	TC
M <sup>Q</sup> T-4RT	4-CH	Modbus RS485	Transistor(4-CH)	RT
M <sup>Q</sup> T-4RA	4-CH	Modbus RS485	Analog(4-CH)	RT
M <sup>Q</sup> T-4RR	4-CH	Modbus RS485	Relay(4-CH)	RT
Expansion module				
M <sup>Q</sup> T-8 I	8-CH	8-channel digital input	-	igital (8-CH)
M <sup>Q</sup> T-8 O	8-CH	8-channel digital output	igital (8-CH)	-
M <sup>Q</sup> T-8CT	8-CH	8-channel current detection	-	Transformer current
M <sup>Q</sup> T-8 M	8-CH	4-channel digital input, 4-channel digital output	igital (4-CH)	igital (4-CH)
M <sup>Q</sup> T-8AI	8-CH	8-channel analog current input	-	Analog (8-CH)
M <sup>Q</sup> T-8AV	8-CH	8-channel analog voltage input	-	Analog (8-CH)
M <sup>Q</sup> T-8AO	8-CH	8-channel analog output	Analog (8-CH)	-

## MTC/MTCW/MTCV Series Temperature Controller

MTC/MTCW/MTCV series products are multi-channel and high-precision temperature controllers, which are suitable for various occasions of temperature control. Its main feature is compatible with TC and RTD, high measure accuracy; high integration (one module supports up to 12 channels of temperature control and 16 channels of measurement), space saving, easy data exchange, remote monitoring, and high cost performance.



- Dedicated software:** Provide special software - MtcCompanion
- Dual-PID function:** Heating&cooling dual-PID control function, 14 alarms like upper and lower limits, deviation, etc
- High precision** Intelligent self-tuning and multi-stage temperature setting functions to achieve high-precision temperature control
- Multi-way control** Integrated multi-channel temperature control to centralize data management
- Easy exchange** Data exchange easily between thermostat and PLC, thermostat and HMI, thermostat and computer through Ethernet and serial port



Item	Description	
Power supply	24V AC (-15% ~ 20%)	
Signal input	Input type	Thermocouple: K, J, E, N, T, R, B (For all channel) Thermal resistance: Pt100, JPt100, Cu100, Ni120 (For all channel)
	Precision	Thermocouple: 0.2% (Full scale) + cold compensation    Thermal resistance: 0.3% (Full scale)
	Sampling cycle	25ms/channel, 100ms/8 channels, 100ms/4 channels
	Output form	Transistor output (SSR drive output), relay output, current output, voltage output
Control output	Control action	Manual, ON / OFF, single PI, heating & cooling PI, position proportional PI
	Alarm form	14 alarms, such as upper and lower limit alarm, deviation alarm and so on.
Alarm output	Output form	Transistor and relay output (output state can be directly controlled by writing registers)
	Output channel	8 channels
IO input	Input form	Transistor input
	Input channel	4 channels
Control cycle	0.1s - 10s or 1s - 100s	
Acquisition channel	4 channels and 8 channels	
Isolation	Exist between power and communication, power and channel, communication and channel, (MTCV)channel and channel	
Communication port	MTC/MTCV: One isolated RS485 serial port; support Modbus BUS slave and MCBUS slave protocol MTCW: One isolated + one non-isolated RS485 serial port, one Ethernet port; support Modbus BUS slave protocol	
Generals	Ambient temperature	Working: -20 ~ 60 °C, storage: -40 ~ 70 °C
	Ambient humidity	Working: 10 ~ 90 % RH (no condensation), keeping: 5 ~ 95 % RH (no condensation)
	Altitude	Below 2000m
	Protection level	IP20
C & S	Conform to IEC/EN 61326-1 (For use in industrial locations) , UL61010-1; CE, UL	

### MTC series

Model	Acquisition channel	Tee	Acq	Flag bit	TC, RT
MTC-04-NT	4-CH	Transistor (4-CH)			
MTC-08-NT	8-CH	Transistor (8-CH)			
MTC-04-NTT	4-CH	Transistor (4-CH)	Transistor(8-CH), flag bit		
MTC-04-NTR	4-CH	Transistor (4-CH), Relay (8-CH)	Relay(8-CH), flag bit		
MTC-04-NVT	4-CH	Transistor (4-CH) Current(8-CH, 0-20mA or 4-20mA) Voltage(8-CH, 0-1V, 0-5V, 0-10V or 1-5V)	Transistor (4-CH)		

### MTCW series (Ethernet 2\*RS485)

Model	Acquisition channel	Tee	Acq	Flag bit	TC, RT
MTCW-04-NTT	4-CH	Transistor (4-CH)	Transistor (4-CH), flag bit		
MTCW-04-NI	4-CH	Current (4-CH, 0-20mA or 4-20mA)	Flag bit		
MTCW-04-NV	4-CH	Voltage (4-CH, 0-1V, 0-5V, 0-10V or 1-5V)	Flag bit		
MTCW-08-NN	8-CH	-	Flag bit		
MTCW-08-NI	8-CH	Current (8-CH, 0-20mA or 4-20mA)	Flag bit		
MTCW-08-NV	8-CH	Voltage(8-CH, 0-1V, 0-5V, 0-10V or 1-5V)	Flag bit		
MTCW-08-NTT	8-CH	Transistor (8-CH)	Transistor (8-CH), flag bit		
MTCW-12-NT	12-CH	Transistor (12-CH)	Flag bit		
MTCW-16-NN	16-CH	-	Flag bit		
MTCW-08-CT	8-CH	Transistor (8-CH)	Flag bit	Current transformer (8-CH)	
MTCW-08-NT	8-CH	Transistor (8-CH heating, 8-CH cooling)	-		

### MTCV series (Channel isolation RS485)

Model	Acquisition channel	Tee	Acq	Flag bit	TC, RT
MTCV-16-NT	16-CH	Transistor (16-CH)			
MTCV-08-NT	8-CH	Transistor (8-CH)			

## MTCE Series Temperature Controller

MTCE series product, as a multi-channel high-precision EtherCAT temperature controller, are adapted to various mainstream master stations. Its main feature is compatible with thermocouples and thermal resistors, high measurement accuracy, feature-rich, user-friendly. It has the characteristics of high integration, space saving, easy data exchange, remote monitoring, and high cost performance.



**Networking capacity** EtherCAT

**High precision** Measure accuracy: full scale of  $\pm 0.15\%$ ; control accuracy:  $\pm 0.2^\circ\text{C}$

**High performance** 0.1s sampling cycle, and 1ms synchronization cycle; a single module can operate PI control and simple logic operation, and monitor analog value



Item	Description	
Power supply	24V C (-15% ~ 20%)	
Signal input	Input type	Thermocouple: K, J, E, N, T, R, B (For all channel)
		Thermal resistance: Pt100, JPt100, Cu100, Ni120 (For all channel)
	Precision	Thermocouple: 0.15% (Full scale) + cold compensation Thermal resistance: 0.3% (Full scale)
	Sampling cycle	25ms/channel, 100ms/8 channels, 100ms/4 channels
Control output	Output form	Transistor output (SSR drive output)
	Output channel	10 channels
	Control action	Manual, ON / OFF, single PI, heating & cooling PI, position proportional PI
Alarm output	Alarm form	14 alarms, such as upper and lower limit alarm, deviation alarm and so on.
	Output form	Transistor output (SSR drive output)
	Output channel	10 channels
Control cycle	0.1s - 10s or 1s - 100s	
Acquisition channel	10 channels	
Isolation	Exist between power and communication, power and channel, communication and channel, channel and channel	
Communication port	EtherCAT	
Generals	Ambient temperature	Working: -20 ~ 60 °C, storage: -40 ~ 70 °C
	Ambient humidity	Working: 10 ~ 90 % RH (no condensation), keeping: 5 ~ 95 % RH (no condensation)
	Altitude	Below 2000m
	Protection level	IP20
C & S	Conform to IEC/EN 61326-1 (For use in industrial locations); CE	

Model	Acquisition channel	Temperature control output	Alarm output	Input type
MTCE-10T-NT	10-CH	Transistor	Flag bit	TC
MTCE-10R-NT	10-CH	Transistor	Flag bit	RT

## MCAS Series Temperature Controller

MCAS series temperature controller takes the lead in realizing the self-tuning PID and calibration parameters of cascade control in the industry based on the advanced self-tuning and self-learning control algorithm, which greatly simplifies the debugging of complex cascade control.



**Cascade control** A single module supports 4-channel cascade temperature control

**High performance** 0.1s sampling cycle

**High precision** Measure accuracy: full scale of  $\pm 0.15\%$ ; cascade control accuracy:  $\pm 0.5$



Item	Description	
Power supply	24V C (-15% ~ 20%)	
Signal input	Input type	Thermocouple: K, J, E, N, T, R, B (For all channel)
		Thermal resistance: Pt100, JPt100, Cu100, Ni120 (For all channel)
	Precision	TC: 0.15% (Full scale) + cold compensation RT: 0.3% (Full scale)
	Sampling cycle	25ms/channel, 100ms/8 channels, 100ms/4 channels
Control output	Output form	Transistor output (SSR drive output)
	Output channel	4/8 channels
	Control action	Manual, ON / OFF, single PI, heating & cooling PI, position proportional PI
Alarm output	Alarm form	14 alarms, such as upper and lower limit alarm, deviation alarm and so on.
	Output form	Transistor output (SSR drive output)
	Output channel	4/8 channels (Transistor)
Control cycle	0.1s - 10s or 1s - 100s	
Acquisition channel	6/8 channels	
Isolation	Exist between power and communication, power and channel, communication and channel, channel and channel	
Communication port	One isolated + one non-isolated RS485 serial port, one Ethernet port; support MODBUS slave protocol	
Generals	Ambient temperature	Working: -20 ~ 60 °C, storage: -40 ~ 70 °C
	Ambient humidity	Working: 10 ~ 90 % RH (no condensation), keeping: 5 ~ 95 % RH (no condensation)
	Altitude	Below 2000m
	Protection level	IP20
C & S	Conform to IEC/EN 61326-1 (For use in industrial locations), UL61010-1; CE, UL	

Model	Acquisition channel	Temperature control output	Alarm output	Input type
MCAS-06-NI	6-CH	Current (6-CH, 0-20mA or 4-20mA)	Flag bit	TC, RT
MCAS-06-NV	6-CH	Voltage (6-CH, 0-1V, 0-5V, 0-10V or 1-5V)	Flag bit	TC, RT
MCAS-08-NI	8-CH	Current (6-CH, 0-20mA or 4-20mA)	Flag bit	TC, RT
MCAS-08-NV	8-CH	Voltage (8-CH, 0-1V, 0-5V, 0-10V or 1-5V)	Flag bit	TC, RT
MCAS-08-NTT	8-CH	Transistor (8-CH)	Transistor (8-CH), flag bit	TC, RT



# MEGMEET

## MZ800 Series Human Machine Interface

